

GROUND MOVING

- Extremely tough and rugged
- 30° angle
- Heavy cylinders
- Bolt-on reversible blade made of steel HBW450
- Coupling for skid loader



DOZER BLADE




Hydraulic hoses with quick couplings

Shockproof valve



TILT DOZER BLADE

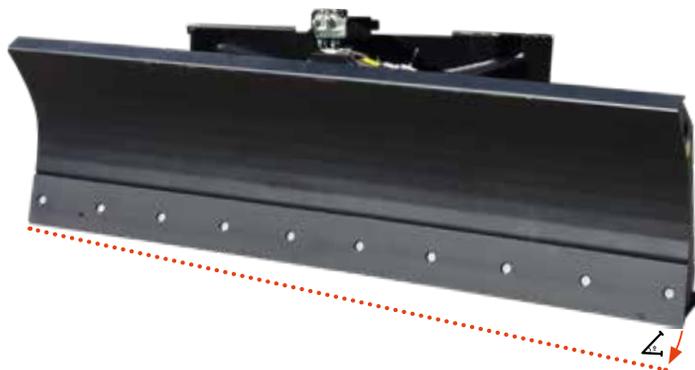

Hydraulic hoses with quick couplings

Shockproof valve

1/2" electrovalve

Hydraulic oscillation +/- 8°

Standard electric kit

LEVELING BOX DOZER BLADE



Proportional distributor

Rear pad with hydraulic control which neutralizes the riding effect


Laser control system

Bolt-in blade

Standard electric kit



DIMENSIONS


LL 240

A	Width	2430
B	Depth	830
C	Height	790

The leveling blade M3 is suitable for backfilling works, drafting of landfill materials and indoor ground levelling with excellent finishing level. Equipped with horizontal plane inclination system controlled by two hydraulic cylinders which allow the blade up and down movement. Moreover it is equipped with an innovative rear skate managed by hydraulic cylinders with relief valve, which, keeping the pressure of the skate constant on the ground, allows a perfect leveling, neutralising the riding effect.

Supplied with proportional distributor, relief valve calibrated to keep the pressure constant, laser leveling system and receivers support poles. It can be supplied with a control system with wifi remote control **A**.





MODEL	LL 240
Blade width [mm]	2400
Weight [kg]	950
Blade height [mm]	740

